

**NEW**



# Mini Chamfer

Optimal for milling, deburring  
and back chamfering



**Carmex**  
Precision Tools Ltd.


Metric

# Mini Chamfer

**Carbide Grade: MT8** Sub Micron grade with Aluminium Titanium Nitride (AlTiN) multi-layer coating (ISO K10-K20).

Extremely high heat resistant and smooth cutting operation, for high performance, and normal machining conditions. General purpose for all materials.

- Optimal for milling, deburring and back chamfering
- Double side cutting
- Spiral flute allows smooth cutting action

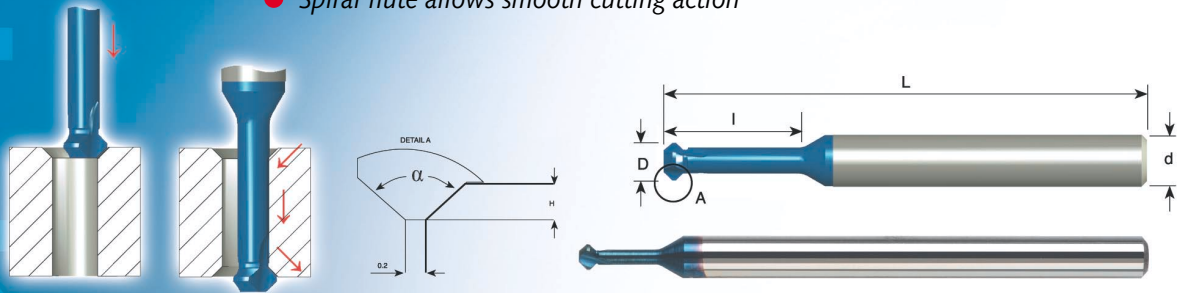

45°

Ordering Code	d	D	I	H	$\alpha$	No. of Flutes	L
MC03015C3 A90	3	1.5	3.8	0.3	90°	3	39
MC0302C5 A90	3	2.0	5.0	0.4	90°	3	39
MC03025C6 A90	3	2.5	6.3	0.5	90°	3	39
MC0303C7 A90	3	3.0	7.5	0.6	90°	3	39
MC04035C9 A90	4	3.5	8.8	0.7	90°	3	51
MC0404C10 A90	4	4.0	10.0	0.8	90°	3	51
MC05045C11 A90	5	4.5	11.3	1.0	90°	3	51
MC0505C12 A90	5	5.0	12.5	1.1	90°	3	51
MC06055C13 A90	6	5.5	13.8	1.2	90°	3	51
MC0606C15 A90	6	6.0	15.0	1.5	90°	3	51

## Long Reach 45°

Ordering Code	d	D	I	H	$\alpha$	No. of Flutes	L
MC0303C12 A90	3	3.0	12.0	0.6	90°	3	39
MC04035C14 A90	4	3.5	14.0	0.7	90°	3	51
MC0404C16 A90	4	4.0	16.0	0.8	90°	3	51
MC05045C18 A90	5	4.5	18.0	1.0	90°	3	51
MC0505C20 A90	5	5.0	20.0	1.1	90°	3	51
MC06055C22 A90	6	5.5	22.0	1.2	90°	3	58
MC0606C24 A90	6	6.0	24.0	1.5	90°	3	58

30°

Ordering Code	d	D	I	H	$\alpha$	No. of Flutes	L
MC0302C5 A60	3	2.0	5.0	0.4	60°	3	39
MC0303C7 A60	3	3.0	7.5	0.6	60°	3	39
MC04035C9 A60	4	3.5	8.8	0.7	60°	3	51
MC0404C10 A60	4	4.0	10.0	0.8	60°	3	51
MC05045C11 A60	5	4.5	11.3	1.0	60°	3	51
MC0505C12 A60	5	5.0	12.5	1.1	60°	3	51